

S1D15106 Series

Automotive 16-Grayscale Segment LCD Driver IC

■ DESCRIPTIONS

The S1D15106 is a segment LCD driver IC that can be directly connected to a microcontroller, enabling the display image data transferred from the microcontroller to be displayed on the segment LCD without external memory. It is also capable of high contrast by static drive and 16-grayscale display by PWM method, making it ideal for improving the expressiveness of speedometer and RPM display.

In addition, it has display safety functions such as segment/common output abnormality (open/short) detection, etc. If a display abnormality is detected due to an open state in the wiring from the driver output to the display, the display can be restored by switching the driver output pin under control from the microcontroller. These display safety functions support the construction of highly reliable display systems. In addition, this product meets the stringent quality requirements for automotive applications, with an operating temperature of up to 105 °C and AEC-Q100 corresponsive.

■ FEATURES


- Segment: 368 outputs Common: 1 output
- High contrast by static drive
- 16-grayscale display by PWM method
- Display safety features

■ OUTLINE SPECIFICATIONS


Operating Power Supply Voltages	System VDD: 2.7 V~5.5 V LCD Drive VLCD: 2.7 V~8.0 V
MPU Interface	3-wire Serial Interface
LCD Driver	Segment: 368 outputs Common 1 output
Grayscale	16-level (PWM)
Display Data RAM	368 outputs x 4 bits (16-grayscale) = 1,472 bits
Safety Features	Display Safety Features
LCD Drive Duty Configuration	1 / 1 (Static Drive)
LCD Drive Bias Configuration	1 / 1 (Static Drive)
LCD Driver Power Supply	External Supply
Error Detection Functions	Bit error detection of command registers Segment/Common output error (Open/Short) detection, etc..
Automotive QA	AEC - Q100 corresponsive -40 to +105 °C
Others	Built-in Oscillation Circuit (External clock input is also available) Power-on Reset Function
Shipment Form	Au Bump Chip

S1D15106 Series

■ System Block Diagram

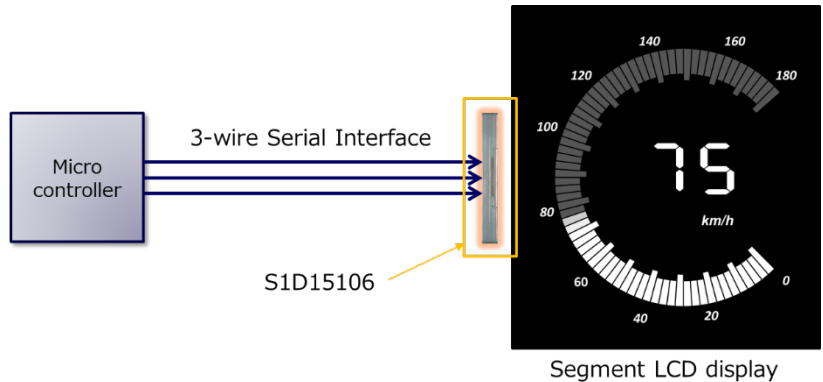

■ Display Safety Feature Example

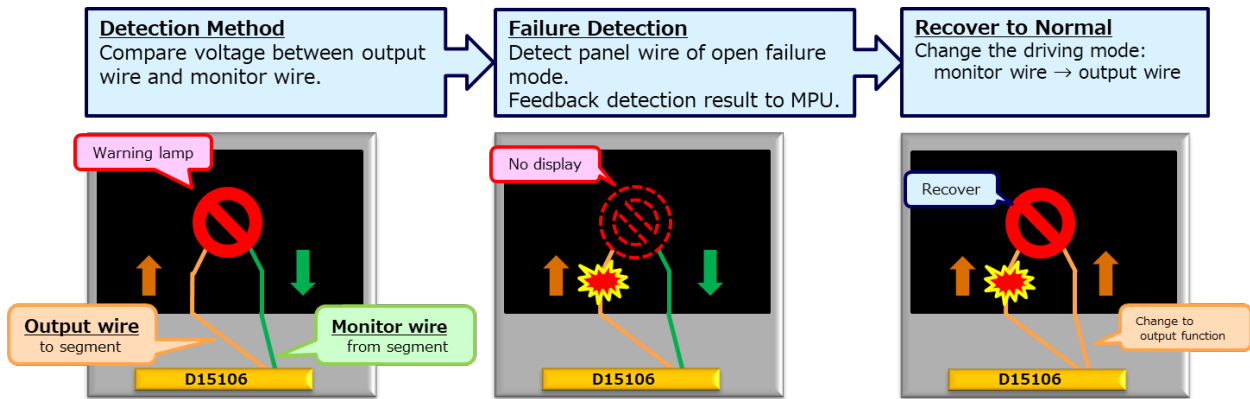

NOTICE

No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. When exporting the products or technology described in this material, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You are requested not to use, to resell, to export and/or to otherwise dispose of the products (and any technical information furnished, if any) for the development and/or manufacture of weapon of mass destruction or for other military purposes.

All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective companies.
©Seiko Epson Corporation 2021, All rights reserved

Seiko Epson Corporation

Sales & Marketing Division

Device Sales & Marketing Department
29th Floor, JR Shinjuku Miraina Tower, 4-1-6 Shinjuku,
Shinjuku-ku, Tokyo 160-8801, Japan

EPSON semiconductor website

global.epson.com/products_and_drivers/semicon/

Document code: 414144700
First issue February, 2021
in Japan